



Public hygiene into the next level; disinfection from Skin to Clothes

With the outbreak of covid-19, it is becoming more and more vital to keep citizens safe in public places.

Yes, germs can stick to clothes; and yes, clothes can spread germs threatening the lives of people.

It's time for us to join hands and spread hygiene awareness outside the home: stepping into secure public places against diseases and viruses through an innovative anti-bacterial structure that disinfects clothes:

"The Safety EveryWear Machine"

Disinfection Tunnel:

A Mega Solution for Preserving Self Hygiene in Public Areas



Material: Material fluid Boeckercertified

Types and shapes:

- High end
- Low end
- Transparent
- Circular
- Custom made finishing looks
- Auto/Semi-auto

Size: 1.2x1.2/1.2x2.4/1.2x3.6 and can be customized

Benefits of the Structure:

- Sprays antibacterial freshness
- Super friendly on fabrics
- Safe on human's skin
- Customized designs
- Easy installment
- Hi-tech

Why "Safety EveryWear"?

• Helps promote public hygiene remotely and in a modern way

- Ensure staff health safety
- Ensure client health safety
- Being the first to opt such technology verses competitor showrooms

MISTING KIT AND NOZZLES



Dimensions: I. 472 w. 374 h. 332 mm Weight: 20-22 Kg. - 550-1250W





Dimensions: I. 490 w. 410 h. 300 mm Weight: 22-25 Kg - 550-1250W



ansions: I. 1010 w. 440 h. 500 mr. ht: 37 Kg - 800-1000W



These 10 and 12 mm fittings features high quality and robustness. Made by 5.Steel they ensure the best corrosion resistance, they can be cleaned with acids. The special fittings have been engineered to withstand pulsations produced by timers and their design allow faster installation. Nozzle holder direction can be adjusted and the fittings are easily removable.

The kit for misting systems can be realized in different ways:


- Mist pump with poly tubing
- Mist pump with copper (nickel platted) tubing
- Mist pump with stainless steel tubing


Every range of misting kits utilizes 1000 psi (or 70 Bar) pumps, different length of poly/copper/stainless steel tubing, a filter assembly with filter cartridge, nozzles, fans and all the needed fittings to connect the line.

We have the ability to provide customized mist kits using a variety of different components and design. The number of nozzles depend on specific system requirements and the high-pressure pumps can be customized to enhance the performance and functionality of a designed misting system.



TYPE A

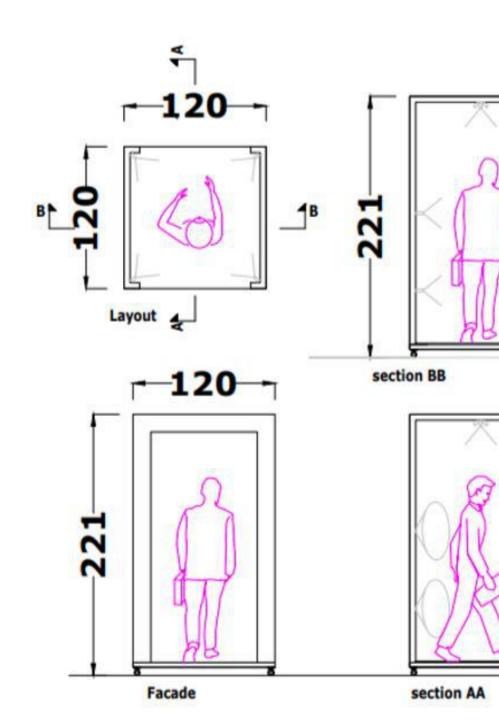

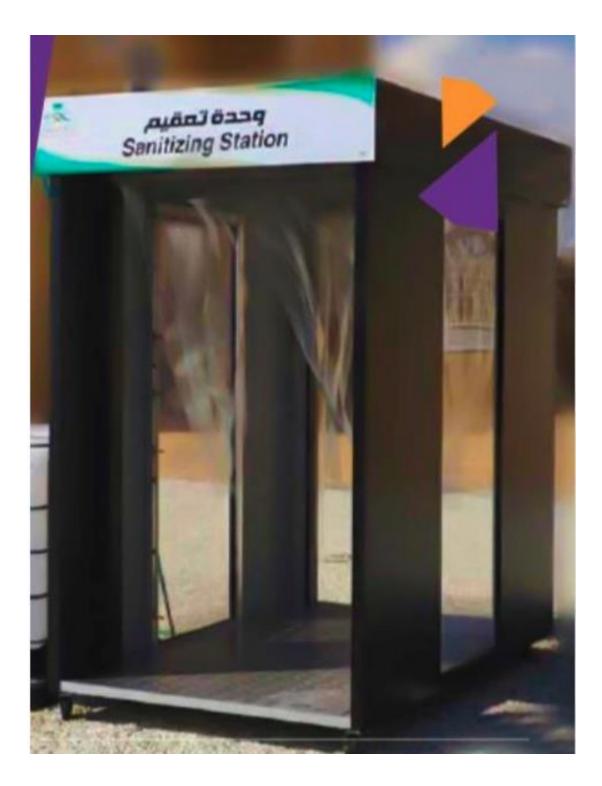











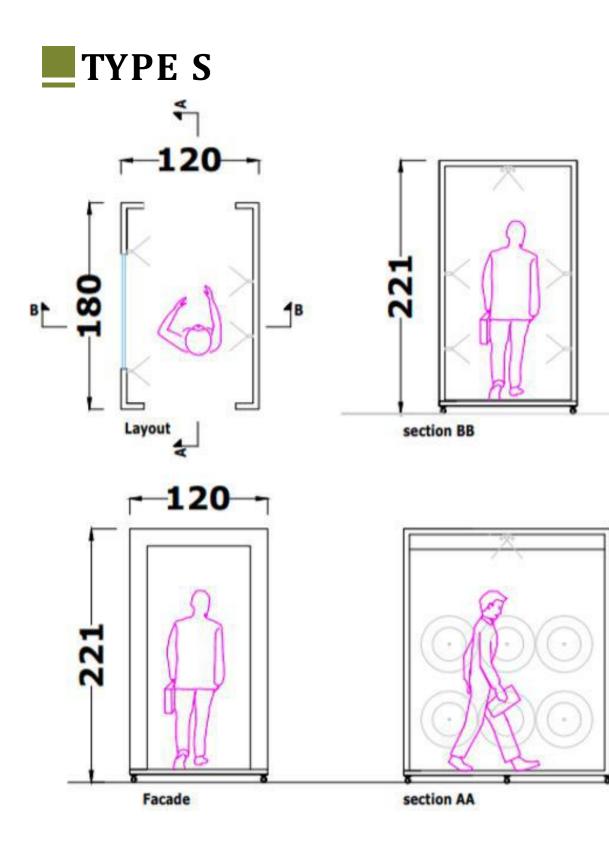





TYPE C

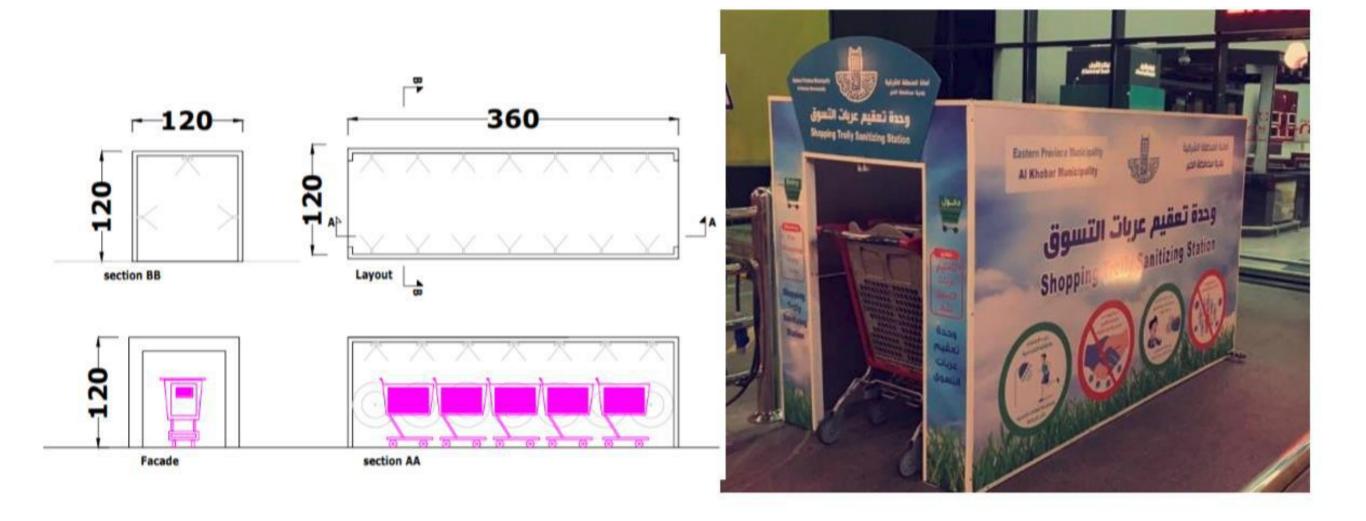

3 PLY SURGICAL MASK





Description:

Passed CE test, EN149: 2001 + A1: 20019
Three-layer filter protection design can effectively
block the droplets and fine particles in the air;
Using non-woven fabric, nanoscale melt-blown
cloth and other filtering materials, light and breathable
soft nose clip, fully close to the face, skin-friendly

Packing details:

61*46*30.5 cm 50 pcs/box 11 kgs



Description:

Passed test:
EN 149: 2001+A1:2009
G B 2626-2006"
non-woven and melt blown fabric

Packing details:

58*31*41 cm 7 kgs 5 pcs/bag



KN95 MASK NIOSH



SHORTCUTS

Description:

- Passed test: EN149:2001
- Filters at least 95% of airborne particles. No resistant to oil.
 Headband design style.
- Arc-ends design of nose clip, avoid scratching the face, safer to wear
- Ultrasonic welding technology, glue-free and odorless.

Packing details:

62*29.5*28.5 cm 4.5 kgs 20 boxes/carton





AIR QUEEN MASK

AirQUEEN[™] Nanofiber Mask A Next-Generation FDA 510k Cleared N95 Substantial Equivalent







AIR QUEEN MASK



FACE SHIELD



SHORTCUTS

Description:

- Passed test EN166:2001
- PET
- Reusable
- Head band Adjustable
- Double-sided anti-fog
- Anti Smoke
- Anti Fluid Splash
- Anti Dust

Packing details:

38*42*36 cm 28 kgs 1,000 pcs/ carton



FACE SHIELD GLASSES



Description:

- Rigid plastic
- Protects from dust and particles



NITRILE GLOVES

Description:

CE certificate Nitrile and vinyl material Non powdered



PROTECTIVE SUIT



SHORTCUTS

Description:

- Elasticated hood around face.
- Elasticated cuffs and ankles.
- Elasticated sleeves.
- Preferably bound seams.

• Zipper with re-sealable flap protecting leakage through seams.

• Stitched-in neck label indicating the type and performance of the suit against the below mentioned standards.

• Material: Lightweight, do not contain rubber/latex



DISPOSABLE GOWNS



Disposable Gowns. Material: Non-woven 25 to 90gr as per your request Long and short sleeve





Material: 65%PP+35%PE Non woven fabricSecond- class material Application: Hospital, chemical industy, food industry, Just for the normal isolation function





SHOES COVER



Material: 65%PP+35%PE Non woven fabricSecond- class material Application: Hospital, chemical industy, food industry, Just for the normal isolation function



PROTECTIVE GOOGLES



Description:

- Passed test EN 166:2001
- High quality PC material
- Antifogging Ventilating, Blocking Droplets
- PC lens
- Air valve

Packing details:

89*49*75cm 24 kgs 480 pcs/ carton




Description:

Oxygen saturation + heart rate



MINI KIT THERMOMETER

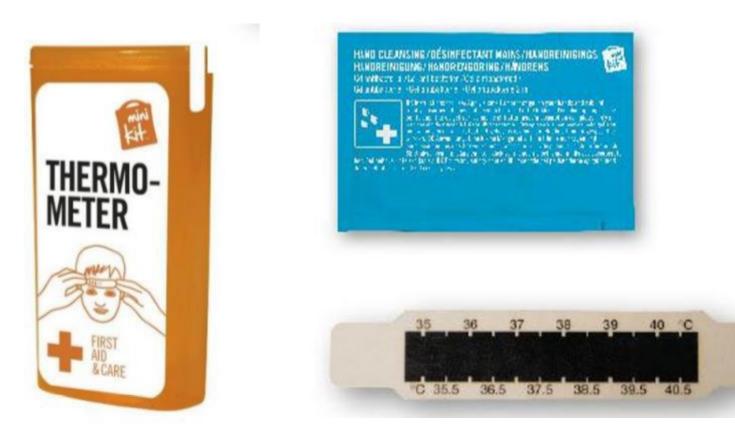

- The perfect kit to allow you to check your or someone else's temperature
- The size of this kit allows you to easily store it in your bag or pocket.
- Contents: 1 forehead thermometer, 1 disinfection gel.
- All of the first aid and care products within the kit meet all applicable EU regulations.

INFRARED THERMOMETER



Description:

• 1. Precise non-contact

measurements

• 2. Selectable Body and Surface temp.

• 3. Set Alarm value.

• 4. Memorization of the last 32 measurements.

5. Automatic selection range and Display Resolution 0.1 °C (0.1°F)
6. User selectable °C or °F.

Packing details:

42*39*38cm 8 kgs 30 pcs/ carton

THERMAL DETECTOR PRO SERIES

• Where to Sell


- Medical Clinics.
- Hospitals.
- Pharmacy's
- Corporate offices.
- Building entrances

• Special Areas to focus

- This device can be configured as an access control device.
- 5000 faces could be configured into this device and can use for the HR related requirements.







Real Time Surveillance Video Live Stream to any Device (PC, Tab, Mobile) Real Time Recording Voice alarm for abnormal body temperature Temperature Detection within 1.5 Meters Mask, Face Detection within 1 meter Special Stand with customizable LED lighting.

Price including Tripod and land shipping to Riyadh -KSA (excluding customs, clearance, taxes or other costs should be handled by the customer)

Stock at hand: 85 units





Real Time Surveillance Video Live Stream to any Device (PC, Tab, Mobile) Real Time Recording Voice alarm for abnormal body temperature Temperature Detection within 1.5 Meters Mask, Face Detection within 1 meter Special Stand with customizable LED lighting. In Built Wifi

Price including Tripod and land shipping to Riyadh -KSA (excluding customs, clearance, taxes or other costs should be handled by the customer)

Stock at hand: 10 units

	echnical Specification	
Ventilation Modes		
	VCV(A/C) PCV(A/C) PRVC SIMV(VCV)+P	SV
	SIMV(PCV)+PSV SIMV(PRVC)+PSV SPONT/CPAP+PS	V
	BIVENT+PSV NIV/CPAP NIV-T NIV-S/T	
Parameters		
 Tidal Volume: 	20~2000 ml	
 Respiration Rate: 	1~80 bpm	
Tinsp:	0.2~9 s	
Tslope:	0~2 s	
Tpause:	0~4 s	
 I:E Ratio; 	1:10~4:1	
 FiO₂: 	21%-100%	
 Trigger Sensitivity: 	Pressure (-20-0 cmH ₂ O, above PEEP)	
	Flow (0.5~20 LPM)	
PEEP:	0~35 cmH2O	
Psupport:	0~70 cmH2O	
Pinsp:	5~70 cmH2O	
Special Procedures		
	Apnea Ventilation Smart Suction Manual Breat	î
	Insp/ Exp Hold ETCO2 Measurement	
	Nebulization Waveform Freeze	
Monitoring		
Pressure Value:	Ppeak, Pplat, Pmean, Pmin, PEEP	
Volume / Flow Value:	Vti, Vte, MV, MVspont	
Time Value:	ftotal,fspont, I:E	
Real Time Curves:	Pressure-Time, Flow-Time, Volume-Time waveforms	
	Pressure-Volume, Volume-Flow, Flow-Pressure loops	
 Gas Monitoring: 	FIO2, ETCO2	
Calculated Values:	Compliance(C)	
	Resistance(R)	
	MVleak	
	RSBI	
	WOB	
	PEEPi	
Alarm		
	Paw high / low MVe high / low Circuit d	isconnec
	FiO ₂ high / low Inspiration / Expiratory tidal volum	
	High Respiration Rate Apnea AC Failure Nebulize	
		W PEEP
	Leakage out of range Occlusion	
Technical Data	Loakage out of failige Coordstoff	
Screen:	12" TFT color touch screen (detachable)	
Supply Gas:	O2, 0.28~0.6 MPa	
Power Supply:	AC100~240 V, 50 Hz/60 Hz	
Communication Interface;	RS-232 Port, Nurse call Port, Ethernet Port	
Dimension (WxDxH):	322 mm x 375 mm x 366 mm (Main Unit)	
	547 mm x 675 mm x 950 mm (Cart)	
Weight:	12.5 kg (Main Unit)	
- Holding	25 kg (Cart)	







UVC TECHNOLOGY



WHAT IS UVC GERMICIDAL LIGHT?

UVC wavelengths are between 250 and 280 nanometers, making them germicidal – meaning they are capable of inactivating microorganisms, such as bacteria, viruses and protozoa.



HOW DOES UVC LIGHT WORK ?

The high energy from short wavelength UVC light damages the DNA of bacteria and viruses thereby preventing replication and ability to infect.



OUR UVC DISINFECTION PRODUCT RANGE

All our UVC products are mercury free and hence environmental friendly. Our products have been tested to be effective in disinfecting 99.9% bacteria such as E. Coli and Staphylococcus.

UVC SMART PHONE STERILIZER



SHORTCUTS

UV-C sterilizer pouch that kills up to 99.9% of the bacteria on the item kept inside the pouch. Place objects like phone, earbuds, jewelry, watches and facemask inside the pouch and connect to a charging source such as a laptop or powerbank (for up to 5 min) to 100% sterilize them using UV-C technology. The external material of the pouch is treated with Antimic robial agents for extra safety. The 2 UV-C LED light inside is non-toxic and made without mercury (beware of many UV lamps in the market) The lights have a lifecycle of 10.000 hours.



UVC BOX + WIRELESS CHARGER





UVC LED STERILIZER



Name: UVC LED Sterilizer Light Product size : 30*200mm Battery : 450mAh Input : 5V/1.6A UV power : 5W InterfaceUSB UV wavelength : 185-254nm N.W:135g



LED UV MINI STERILIZER



Quick Guide > Press & hold the button "180s(ON/OFF)" to 1 Take out the sterilizer 2 Put in the items to be disinfected, unfold and unfold the stand the UV Shield to cover the sterilizer. switch on , click the "59s" button to enter guick-disinfection mode, and click 180s to enterstrong disinfection mode.

(Very High End Product) Color: White Net Weight: 200g LED QTY: 6pcs LED Lifetime: 10,000 Hours Power: 4W LED wavelength: 260-280nm Input Interface: Micro USB Rate Input: 5V Battery: 1000mAh Size: 140X69X17mm Net Weight: 200g

Name: LED UV Mini Sterilizer



UVC LED STERILIZING BIG BOX



SHORTCUTS

Name: UVC Led Sterilizing Big Box (Not included in the Quotation) LED QTY: 8pcs Input Interface: Type C Rate Input : 10V=700mA LED Wavelength:260-280nm Power: 8W Commodity Quality Certification: 3C,CE Material: Plastic Size: 216x105x70mm Power: 8W Weight: 850g



Fit Whatever InsideToothbrushes, makeup brushes, nail tools, small toys, denture, eyeglasses, jewelry, cell phone...




ANTI BAC TERIAL PEN - 1

Treated with Japanese Antibacterial agent produced with SIAA Member. Great Branding Space on clip





ANTI BAC TERIAL PEN - 2

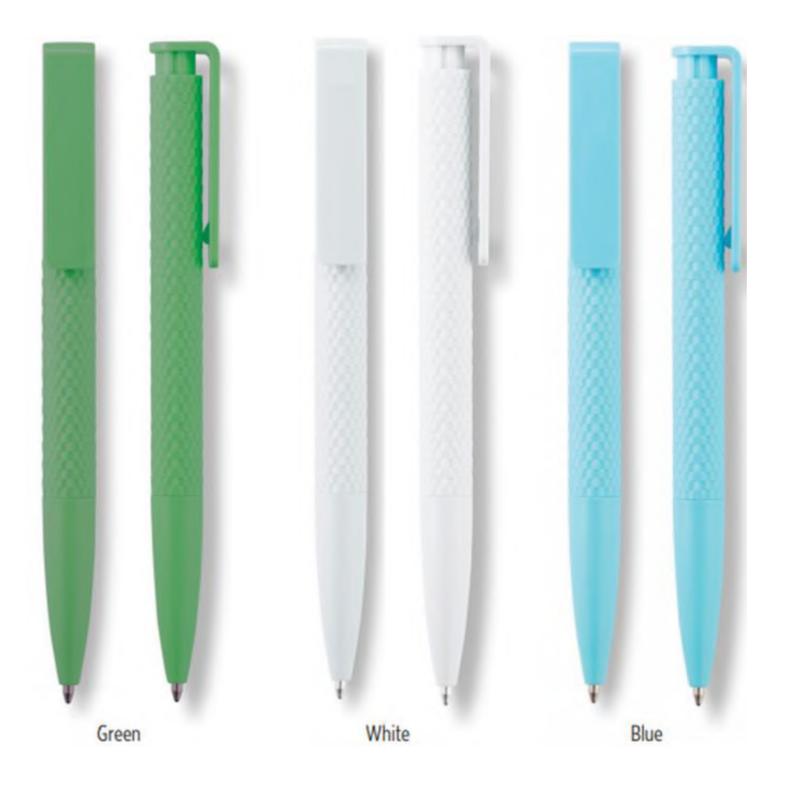

Treated for bacterial. effectiveness German Dokumental® Ink. 1200m writing length

MASK STRAP



SHORTCUTS

Description:

- PE material
- size 16 cm
- 6 adjustment options
- Completely solves ear pain problem

Packing details:

52*47.5*34.5cm 4000 pcs 21.5 kgs

















CRUTCHES





DIABETES





FOLDING WALKING FRAME





MEDIPENSE ASSISTIVE DEVICES



+ 961 1 204 011

• + 961 71 212 320

query@shortcuts-me.com

www.shortcuts-me.com